


FORK SEAL KIT



Double Lip Side Towards Oil Seal Profile:

Our seal profiles are engineered to create equal pressure on each seal lip. Equalized seal pressure means less stiction and longer life

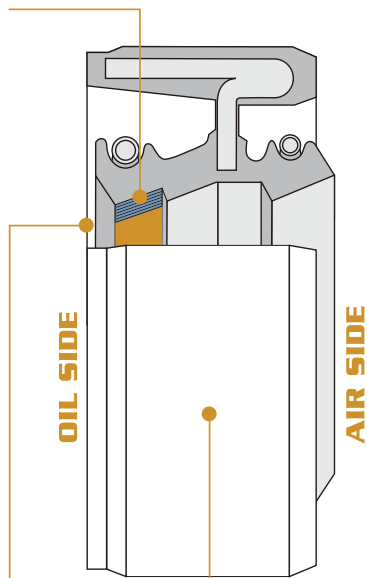

Patented:
Triple Lip Seal Design

Patented:
Max-Life® Elastomer
Our elastomer has a coefficient of friction up to 3X lower than OEM seals



Double Spring, Triple Lip Fork Seals

- Dyno tested to last 3 to 4 times longer than OEM Seals
- Custom Elastomer has from 1/3 to 1/2 less stiction than OEM Seals
- Each kit contains 2 seals
- Competitively priced

Part Number	Kit Number	ID mm	OD mm	Width	Width (incl shoulder)
155-100	155-100	26	37	10.5	
155-101	55-101	27	39	10.5	
155-102	55-102	30	40.5	10.5	
155-103	55-103	30	42	10.5	
155-104	55-104	31	43	10	
155-106	55-106	33	45	10.5	
155-107	55-107	33	46	11	
155-108	55-108	35	48	11	
155-109	55-109	36	48	11	
155-110	55-110	36	48	8	9.5
155-111	55-111	37	50	11	
155-112	55-112	38	50	10.5	
155-137	55-137	38	50	8	10.5
155-113	55-113	39	52	11	
155-114	55-114	43	53	9.5	
155-115	55-115	32	42	9	
155-116	55-116	41	53	10.5	
155-117	55-117	41	53	8	10.5
155-118	55-118	41	53	8	9.5
155-119	55-119	41	54	11	
155-120	55-120	43	54	11	
155-121	55-121	43	54	9	
155-122	55-122	43	55	10.5	
155-123	55-123	43	55	9.5	10
155-124	55-124	45	57	11	
155-125	55-125	46	58	10	
155-126	55-126	46	58	9.5	11.5
155-127	55-127	47	58	10	
155-128	55-128	35	47	10	
155-129	55-129	49	60	11	
155-130	55-130	50	63	11	
155-131	55-131	48	58	9.5	
155-132	55-132	48	58	8.5	10
155-133	55-133	34	46	10.5	
155-134	55-134	50	60	10.5	
155-135	55-135	45	58	11	
155-139	55-139	40	52	8	
155-140	55-140	48	61	11	